


# Multi-Room Audio Premium System Speakers

**KRIX**  
experience sound

**CLIPSAL**<sup>®</sup>

by **Schneider** Electric

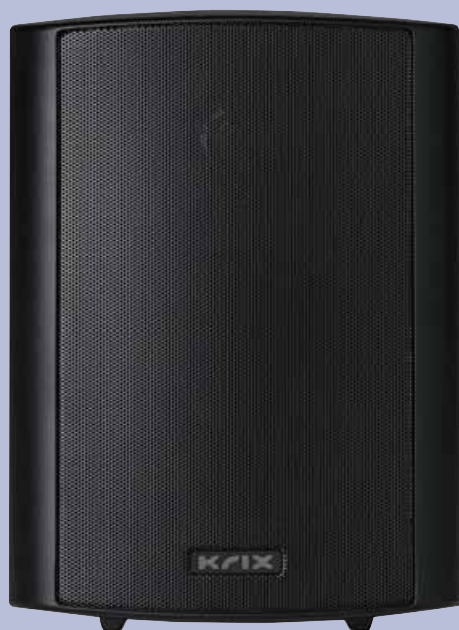

5600K Series

Clipsal's range of premium speakers are perfect for home theatre, multi-room audio and outdoor audio applications.

Clipsal has partnered with Krix to provide the best speakers to complement the C-Bus Multi-Room Audio (MRA) system.

All in-ceiling speaker models come complete with back boxes to maximise and control bass response whilst keeping out dust.

Providing outdoor speaker solutions can often be difficult but Clipsal has risen to the challenge of delivering high quality outdoor sound reproduction within a marine grade waterproof, all weather enclosure.

All outdoor speakers are available in black or white and are fitted with an aluminium grille and mounting bracket, plus marine grade stainless steel hardware to protect against corrosion.

<b>Catalogue No.</b>	<b>5600K01-WE</b>
<b>Description</b>	Pair Holographix Speakers
<b>Frequency range</b>	90Hz - 20kHz in room response
<b>Power handling</b>	Minimum 20 watts – Maximum 40 watts RMS amplifier power
<b>Sensitivity</b>	87dB for 2.83 volts at one metre
<b>Configuration</b>	3 inch full range
<b>Bass driver</b>	Nominal 75mm (3") polypropylene cone, with a 20mm (3/4") voice coil wound and neodymium magnet
<b>Impedance</b>	Nominally 8 ohms
<b>Enclosure type</b>	Infinite baffle
<b>Dimensions</b>	95mm diameter x 108mm deep
<b>Mounting cut-out</b>	83mm diameter
<b>Finish</b>	White (can be painted to match your décor)
<b>Input terminals</b>	Push type connectors
<b>Weight</b>	0.5kg each

<b>Catalogue No.</b>	<b>5600K02-WE</b>
<b>Description</b>	Single Hemispherix Speaker
<b>Frequency range</b>	65Hz - 20kHz in room response
<b>Power handling</b>	Maximum 60 watts RMS amplifier power
<b>Sensitivity</b>	86dB for 2.83 volts at one metre
<b>Configuration</b>	4 inch 2-way
<b>Bass driver</b>	Nominal 100mm (4") doped paper cone. 25mm (1") voice coil wound on high temperature Kapton former
<b>Tweeter</b>	25mm (1") fabric dome, adjustable 'eyeball'
<b>Crossover point</b>	2kHz
<b>Impedance</b>	Nominally 6 ohms
<b>Enclosure type</b>	Bass reflex, front vented, sealed back
<b>Dimensions</b>	240mm diameter x 140mm deep
<b>Mounting cut-out</b>	205mm diameter
<b>Finish</b>	White (can be painted to match your décor)
<b>Input terminals</b>	Push type connectors
<b>Weight</b>	2kg each

<b>Catalogue No.</b>	<b>5600K03-WE</b>
<b>Description</b>	Single Atmospherix Speaker
<b>Frequency range</b>	45Hz - 20kHz in room response
<b>Power handling</b>	Maximum 100 watts RMS amplifier power
<b>Sensitivity</b>	90dB for 2.83 volts at one metre
<b>Configuration</b>	5 inch 2-way
<b>Bass driver</b>	Cast aluminium basket with a nominal 130mm (5") doped curvilinear paper cone. 25mm (1") voice coil wound on high powered aluminium former, with copper shorting ring. Vented and double magnet shielded
<b>Tweeter</b>	25mm (1") fabric dome, adjustable 'eyeball'
<b>Crossover point</b>	2.1kHz
<b>Impedance</b>	Nominally 6 ohms
<b>Enclosure type</b>	Bass reflex, front vented, sealed back
<b>Dimensions</b>	280mm diameter x 190mm deep
<b>Mounting cut-out</b>	247mm diameter
<b>Finish</b>	White (can be painted to match your décor)
<b>Input terminals</b>	Push type connectors
<b>Weight</b>	3kg each

<b>Catalogue No.</b>	<b>5600K06-WE or 5600K06-BK</b>
<b>Description</b>	Pair Aquatix Speakers
<b>Frequency range</b>	70Hz - 20kHz on wall response
<b>Power handling</b>	Maximum 80 watts RMS amplifier power. Polyswitch protection has been installed for the tweeter
<b>Sensitivity</b>	87dB for 2.83 volts at one metre
<b>Configuration</b>	5 inch 2-way
<b>Bass driver</b>	Nominal 130mm (5") polypropylene cone with rubber surround. 25mm (1") high temperature voice coil wound on a radial vented kapton former
<b>Tweeter</b>	22mm specially damped mylar dome with phase plug. Ferro fluid cooled
<b>Crossover point</b>	3kHz
<b>Impedance</b>	Nominally 8 ohms
<b>Enclosure type</b>	Sealed and gasketed waterproof trapezoid enclosure with internal bracing. Injection moulded with UV stabilizing
<b>Dimensions</b>	250mm high x 185mm wide x 190mm deep
<b>Mounting</b>	Adjustable 'U' shaped aluminium bracket
<b>Finish</b>	Painted satin white or black
<b>Input terminals</b>	Five way hand tightened binding posts, nickel plated
<b>Weight</b>	2.5kg each including bracket

<b>Catalogue No.</b>	<b>5600K07-WE or 5600K07-BK</b>
<b>Description</b>	Pair Tropix Speakers
<b>Frequency range</b>	55Hz - 20kHz on wall response
<b>Power handling</b>	Maximum 100 watts RMS amplifier power. Polyswitch protection has been installed for the tweeter
<b>Sensitivity</b>	87dB for 2.83 volts at one metre
<b>Configuration</b>	6½ inch 2-way
<b>Bass driver</b>	Nominal 165mm (6½") polypropylene cone with rubber surround. 25mm (1") high temperature voice coil wound on a radial vented kapton former and copper shorting ring for lower distortion
<b>Tweeter</b>	26mm (1") specially damped mylar dome with phase plug. Ferro fluid cooled
<b>Crossover point</b>	2.4kHz
<b>Impedance</b>	Nominally 8 ohms
<b>Enclosure type</b>	Sealed and gasketed waterproof trapezoid enclosure with internal bracing. Injection moulded with UV stabilizing
<b>Dimensions</b>	305mm high x 220mm wide x 225mm deep
<b>Mounting</b>	Adjustable 'U' shaped aluminium bracket
<b>Finish</b>	Painted satin white or black
<b>Input terminals</b>	Five way hand tightened binding posts, nickel plated
<b>Weight</b>	3.5kg each including bracket

### Clipsal Australia Pty Ltd

A member of Schneider Electric

#### Head Office

33-37 Port Wakefield Road,  
Gepps Cross, South Australia 5094

#### CIS Technical Support Hotline:

<b>Australia</b>	<b>1300 722 247</b>
<b>New Zealand</b>	<b>0800 888 219</b>
<b>Northern Asia</b>	<b>+852 2484 4157</b> <b>(Hong Kong)</b>
<b>South Africa</b>	<b>011 314 5200</b>
<b>Southern Asia</b>	<b>+603 7665 3555 x236 or 242</b>
<b>United Kingdom</b>	<b>+44 870 608 8 608</b>

Technical Support Email: [cis\\_support@clipsal.com.au](mailto:cis_support@clipsal.com.au)

#### National Customer Care Enquiries:

**1300 2025 25**

#### National Customer Care Facsimile:

**1300 2025 56**

<b>New Zealand</b>	Schneider Electric (NZ) Ltd	Tel +64 9 576 3403
<b>Malaysia</b>	Clipsal Integrated Systems (M) Sdn Bhd	Tel +60 3 7665 3555

#### Singapore

Clipsal Integrated Systems Pte Ltd  
Tel +65 6415 3232/3233

#### China

Clipsal China Limited Tel +86 755 8237 5959

#### Greece

Schneider Electric AE Tel +30 69 4646 3200

#### Hong Kong

Clipsal Integrated Systems (HK) Limited  
Tel +852 2487 0261

#### India

Schneider Electric India Pvt Ltd  
Tel +91 11 5159 0000

#### Indonesia

PT Clipsal Graha Nusa Tel +62 21 630 6430

#### Korea

Clipsal Korea Co. Ltd Tel +82 549 5550

#### Pakistan

Clipsal Pakistan (Pvt) Ltd Tel +92 21 506 7278

#### Philippines

Clipsal Philippines Inc. Tel +632 683 0275-78

#### South Africa

Clipsal South Africa (Pty) Ltd Tel +27 11 314 5200

#### Taiwan

Clipsal (Taiwan) Co Ltd Tel +886 2 2558 3456

#### Thailand

Clipsal Thailand Ltd Tel +66 2 952 5338-42

#### United Arab Emirates

Clipsal Middle East Tel +971 6 5570 777

#### United Kingdom

Clipsal Integrated Systems  
c/o Schneider Electric Tel +44 870 608 8 608

#### Vietnam

Clipsal - VTEC Tel +848 856 3002

You can find this datasheet and many others online in PDF format at: [clipsal.com](http://clipsal.com)

**[clipsal.com/cis](http://clipsal.com/cis)**

Clipsal Australia Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this catalogue are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© Clipsal Australia Pty Ltd

This material is copyright under Australian and international laws. Except as permitted under the relevant law, no part of this work may be reproduced by any process without prior written permission of and acknowledgement to Clipsal Australia Pty Ltd. The identified trademarks and copyrights are the property of Clipsal Australia Pty Ltd unless otherwise noted.

